

# 3G Mini GPS Tracker PT591

## User Manual



Please read this manual carefully before installation and online activation. Pictures are for indication and illustration only.

### 1. Preparation before start.

- (1) Check all the accessories.
- (2) Install Nano SIM card and make sure SIM card with enough balance and workable with GPRS. (Note: Power off before you insert the Nano SIM card)
- (3) Install the APP on mobile phone.

Search "Beehome" in APP store, and scan below QR code for Android phone:



For PC: [beehome.mini361.com](http://beehome.mini361.com)

### (4) Indicator light



Device status	Indicator light
---------------	-----------------



Power on	<b>Green</b> light for 5 secs
SIM Network connected	<b>Blue</b> light flashing for 5 secs
SIM Network not connected	<b>Red</b> light for 1 sec
Fully charged	Solid <b>GREEN</b> light

## 2. Quick Start

### 2.1 Set APN

Login the App, add the devices(power on state with workable sim card inside), “Home” page, click “More” to go to “Command list”, set APN.

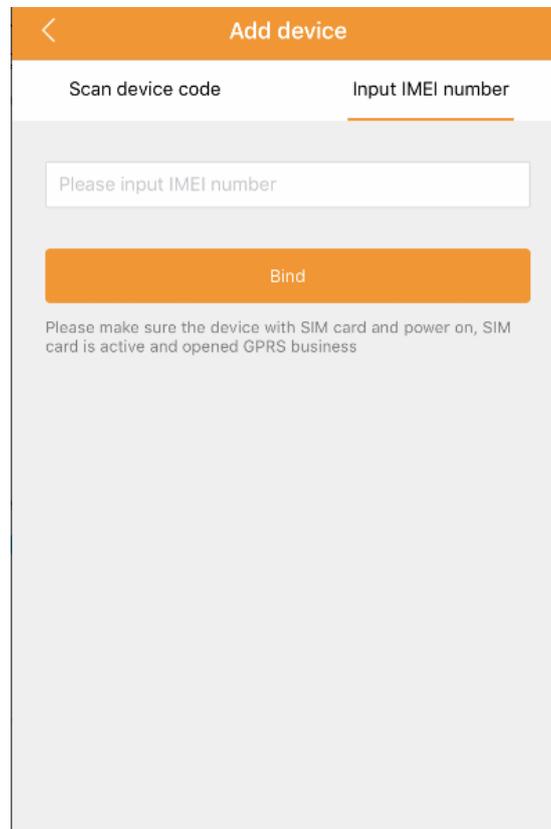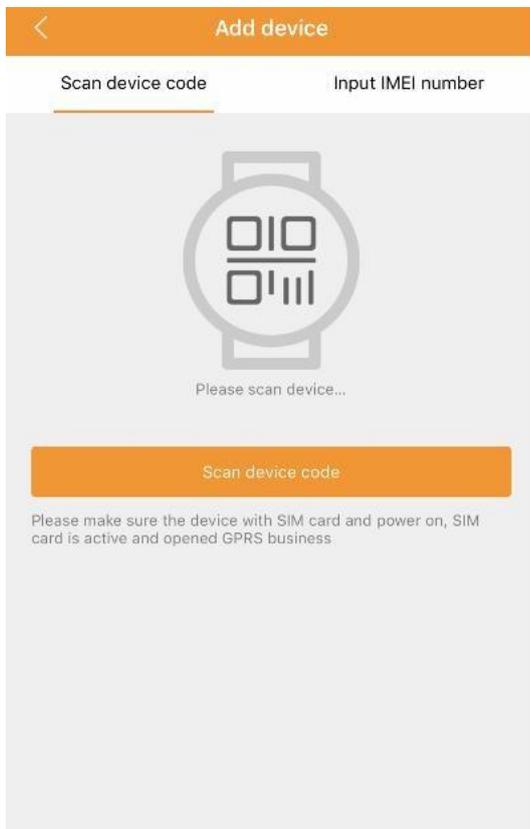

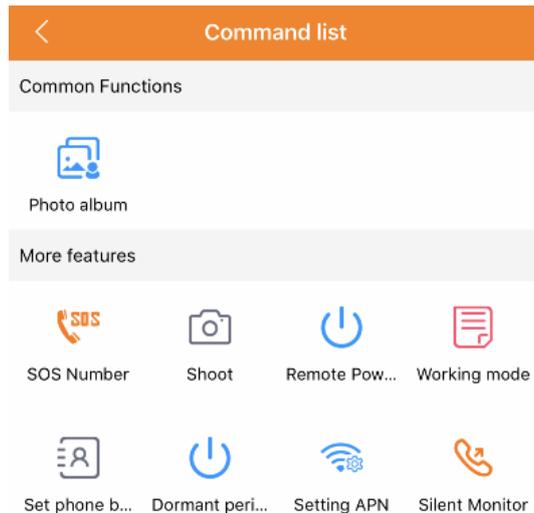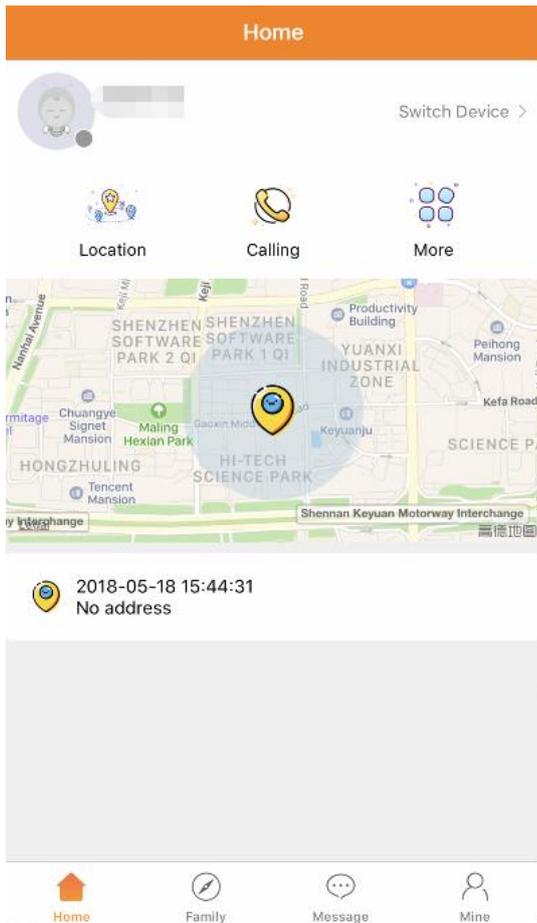

## 2.2 Set SOS number

Command list” page, click “SOS number” to set sos number, three sos numbers can be set up in total. Long press device button for 5 seconds to trigger SOS process, then dial the preset phone number in turn, and send Emergency message to mobile phone.

## 2.3 Command list

Shoot- Click setting to send a command to take a photo, at least 10 seconds once for uploading. And view the pictures in “photo album”.

Remote power off- Click setting to send a command to shutdown remotely

Working mode- Three optional working mode: Real-time tracking, emergency positioning, power-saving mode

Set phone book- After set phone numbers, the device can receive incoming calls.


Dormant period- Set dormancy time manually, then the device will power on/off automatically within the setup time.


Silent monitor- Mute monitoring, click setting to send a command to monitor the device, trigger the device to call back quietly.

## 2.4 Home page

Location- real-time location

Calling- This calling number is monitoring number, can be set up manually. After set this number, the device can receive incoming call.

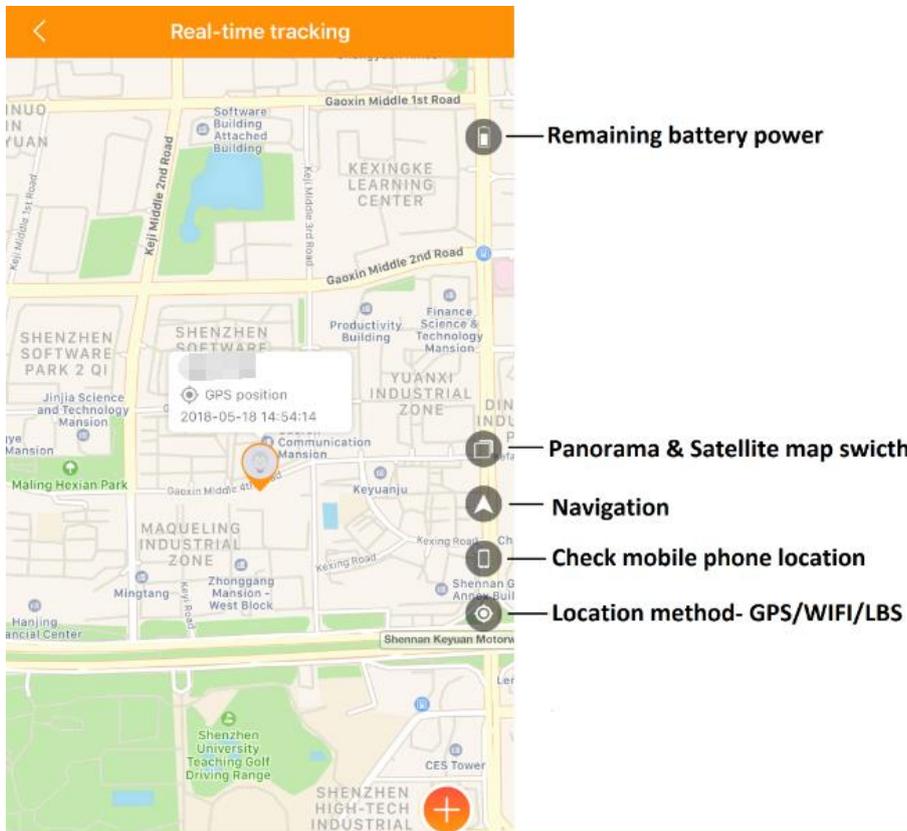

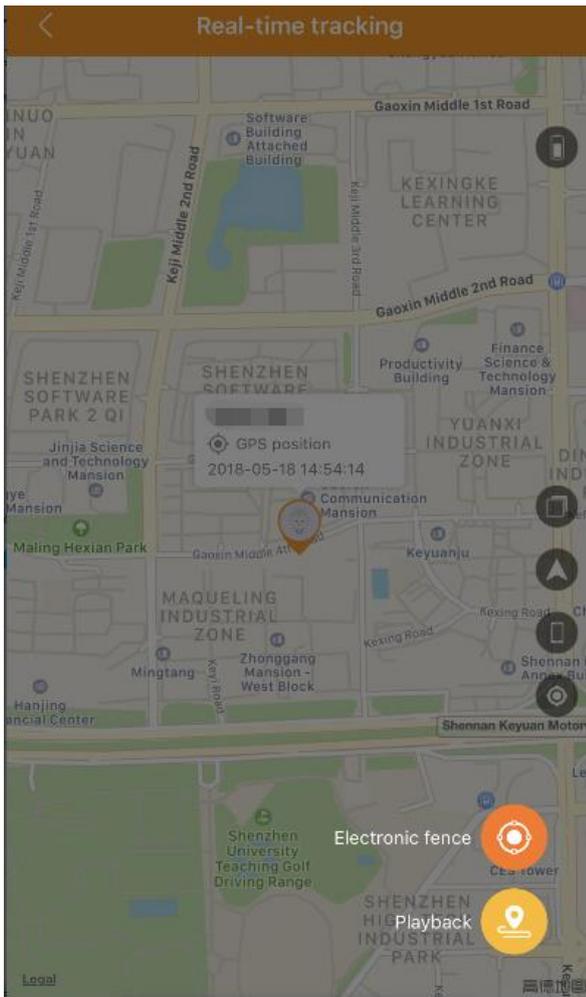

Electronic fence- Set the safety area for the device, and alarm message will be sent if the device enter or out of the area.

Playback- Check current or historic locations of family members, takes care of safety to a whole new level!

## 2.6 Menu

Family- monitoring number page

Message- Device offline message and text message. NB: make sure that the telephone number you want to send is in the phone book , otherwise you will fail to send message because of white list protection.

Mine- Device profile, information center, change password, About us